

Product Information

RO membrane 4x40, Toray Model TMG-10D: \$290.00

Ultra Low Pressure BWRO, Enhanced Chemical Tolerance

Type: TMG-10D


Diameter: 4"

Membrane Area - ft² (m²): 87(8)

Salt Rejection - % : 99.7

Product Flow Rate - gpd(m³ / d): 2,650(10.0)

Feed Spacer Thickness - mil: 34

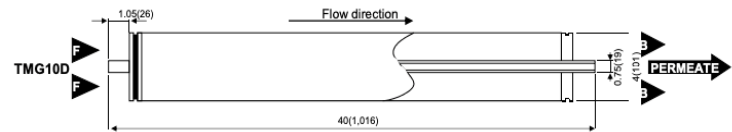

Membrane Type

Polyamide Composite

Test Conditions

Feed Water Pressure

Feed Water Temperature

Feed Water Concentration

Recovery Rate

Feed Water pH

Minimum Salt Rejection

Minimum Product Flow Rate

/d)(TMG10D)

Cross Linked Fully Aromatic

150 psi(1.03MPa)

77°F(25°C)

2000 mg/l NaCl

15%

7

99.5%

2,120gpd(8.0m³